

# SEVERE DUTY LOADER ROCK BUCKET

## RECOMMENDED APPLICATIONS:

Specifically designed to penetrate severe digging applications or re-handle loose rock.

## QUALITY CONSTRUCTION:


High strength, T-1 steel is utilized in all critical wear points of the bucket. Abrasion-resistant steel is used in wear-plates to reinforce bottom of bucket. Each bucket is engineered with tapered side plates to reduce wear on the buckets sides, and to allow for easier dumping.

## STANDARD SIZES AVAILABLE:

2 cu. yd to 10.0 cu. yd. Widths range from 100" - 144". Other capacities and widths are available upon quotation. Available in spade nose and straight edge options.

## ADDITIONAL FEATURES:

Available with replaceable bolt-on cutting edge upon request. Weld-on teeth are standard equipment. Other tooth selections available. Easily mounts up to Werk-Brau front coupler or available with pin-up connection. Special designs and capacities are available, please request a quote from a Dealer or contact Werk-Brau directly.

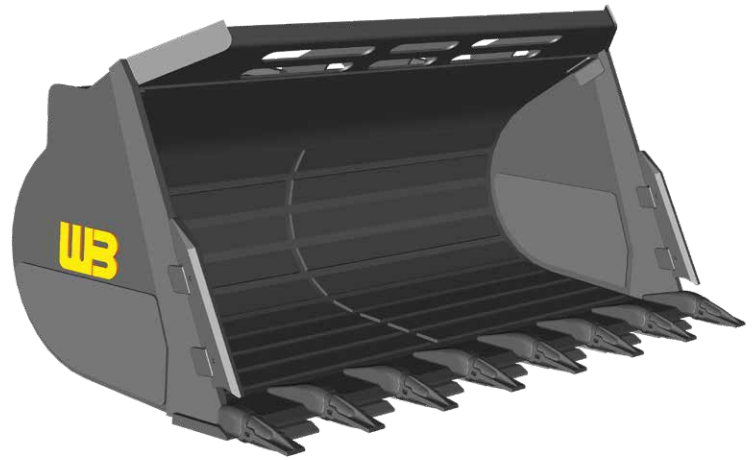

CONTINUED ON NEXT PAGE

# SEVERE DUTY LOADER ROCK BUCKET

## SEVERE DUTY ROCK LOADER BUCKET

LOADER CLASS	PART NUMBER	BUCKET WIDTH	EDGE LENGTH	NO. OF TEETH	CAPACITY STRUCK	CAPACITY RATED	WEIGHT
1	WL1R100-2.00	100"	102"	7	1.69	2.00	2500
1	WL1R100-2.00SP	100"	102"	7	1.69	2.00	2800
1	WL1R100-2.50	100"	102"	7	2.17	2.50	2700
1	WL1R100-2.50SP	100"	102"	7	2.17	2.50	3000
2 & 3	WL3R100-2.50	100"	102"	7	2.17	2.50	2700
2 & 3	WL3R100-2.50SP	100"	102"	7	2.17	2.50	3000
2 & 3	WL3R100-3.00	100"	102"	7	2.54	3.00	3500
2 & 3	WL3R100-3.00SP	100"	102"	7	2.54	3.00	3900
3.5	WL3.5R105-3.00	105"	108"	8	2.54	3.00	4200
3.5	WL3.5R105-3.00SP	105"	108"	8	2.54	3.00	4600
3.5	WL3.5R105-3.50	105"	108"	8	2.97	3.50	4600
3.5	WL3.5R105-3.50SP	105"	108"	8	2.97	3.50	5000
4	WL4R117-4.00	117"	119"	8	3.30	4.00	4600
4	WL4R117-4.00SP	117"	119"	8	3.30	4.00	5200
4	WL4R117-4.50	117"	119"	8	3.81	4.50	5200
4	WL4R117-4.50SP	117"	119"	8	3.81	4.50	5500
5	WL5R124-4.75	124"	126"	8	3.95	4.75	6100
5	WL5R124-4.75SP	124"	126"	8	3.95	4.75	6500
5	WL5R124-5.50	124"	126"	8	4.60	5.50	6500
5	WL5R124-5.50SP	124"	126"	8	4.60	5.50	6900
5	WL5R124-6.25	124"	126"	8	5.30	6.25	7400
5	WL5R124-6.25SP	124"	126"	8	5.30	6.25	7900
6	WL6R138-6.50	138"	140"	9	5.51	6.50	8000
6	WL6R138-6.50SP	138"	140"	9	5.51	6.50	8500
6	WL6R138-7.50	138"	140"	9	6.36	7.50	9300
6	WL6R138-7.50SP	138"	140"	9	6.36	7.50	9800
7	WL7SD144-8	144"	147"	9	7.00	8.00	13500
7	WL7SD144-8SP	144"	147"	9	7.00	8.00	14000
7	WL7R144-9.00	144"	147"	9	8.00	9.00	14200
7	WL7R144-9.00SP	144"	147"	9	8.00	9.00	14700
7	WL7R144-10	144"	147"	9	9.00	10.00	15000
7	WL7R144-10SP	144"	147"	9	9.00	10.00	15500